Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 95038

MOC3020X, MOC3021X, MOC3022X, MOC3023X
MOC3020, MOC3021, MOC3022, MOC3023

OPTICALLY COUPLED BILATERAL SWITCH NON-ZERO CROSSING TRIAC

APPROVALS

- UL recognised, File No. E91231

'X' SPECIFICATION APPROVALS

- VDE 0884 in 3 available lead forms : -
  - STD
  - G form
  - SMD approved to CECC 00802

DESCRIPTION

The MOC302_ series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode coupled with a light activated silicon bilateral switch performing the functions of a triac mounted in a standard 6 pin dual-in-line package.

FEATURE

- Options :-
  10mm lead spread - add G after part no.
  Surface mount - add SM after part no.
  Tape&reel - add SMT&R after part no.
- High Isolation Voltage ($5.3kV_{RMS}$,$7.5kV_{PK}$)
- 400V Peak Blocking Voltage
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS

- CRTs
- Power Triac Driver
- Motors
- Consumer appliances
- Printers

OPTION SM
SURFACE MOUNT



OPTION G



Dimensions in mm

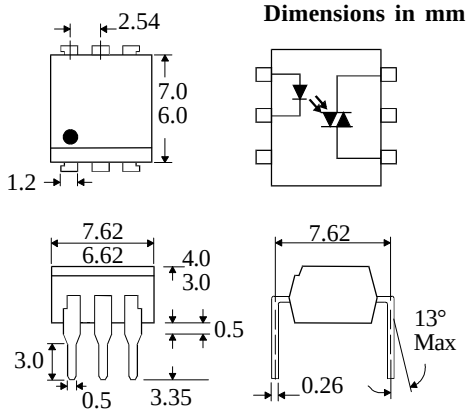

ABSOLUTE MAXIMUM RATINGS
(25 °C unless otherwise noted)

Storage Temperature	-55°C - +150°C
Operating Temperature	-40°C - +100°C
Lead Soldering Temperature (1.6mm from case for 10 seconds)	260°C
Input-to-output Isolation Voltage (Pk) (60 Hz , 1sec. duration)	7500 Vac

INPUT DIODE

Forward Current	50mA
Reverse Voltage	6V
Power Dissipation (derate linearly 0.93mW/°C above 25°C)	70mW

OUTPUT PHOTO TRIAC

Off-State Output Terminal Voltage	400V
RMS Forward Current	100mA
Forward Current (Peak)	1A
Power Dissipation (derate linearly 4.0mW/°C above 25°C)	300mW

POWER DISSIPATION

Total Power Dissipation (derate linearly 4.4mW/°C above 25°C)	330mW

ELECTRICAL CHARACTERISTICS (T_A = 25°C Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)		1.2	1.5	V	I_F = 10mA
	Reverse Current (I_R)			100	µA	V_R = 6V
Output	Peak Off-state Current (I_{DRM})			100	nA	V_{DRM} = 400V (note 1)
	Peak Blocking Voltage (V_{DRM})	400			V	I_{DRM} = 100nA
	On-state Voltage (V_{TM})		1.5	3.0	V	I_{TM} = 100mA (peak)
	Critical rate of rise of off-state Voltage (dv/dt) (note 1)		10		V/µs	
	Critical rate of rise of commutating Voltage (dv/dt) (note 1)	0.1	0.2		V/µs	I load = 15mA, V_{IN} = 30V (fig 1.)
Coupled	Input Current to Trigger (I_{FT})(note 2)					
	MOC3020			30	mA	V_D = 3V (note 2)
	MOC3021			15	mA	
	MOC3022			10	mA	
	MOC3023			5	mA	
	Holding Current , either direction (I_H)		100		µA	
	Input to Output Isolation Voltage V_{ISO}	5300			V_{RMS}	See note 3
		7500			V_{PK}	See note 3

Note 1. Test voltage must be applied within dv/dt rating.
Note 2. Guaranteed to trigger at an I_F value less than or equal to max. I_{FT}, recommended I_F lies between Rated I_{FT} and absolute max. I_{FT}.
Note 3. Measured with input leads shorted together and output leads shorted together.

FIGURE 1

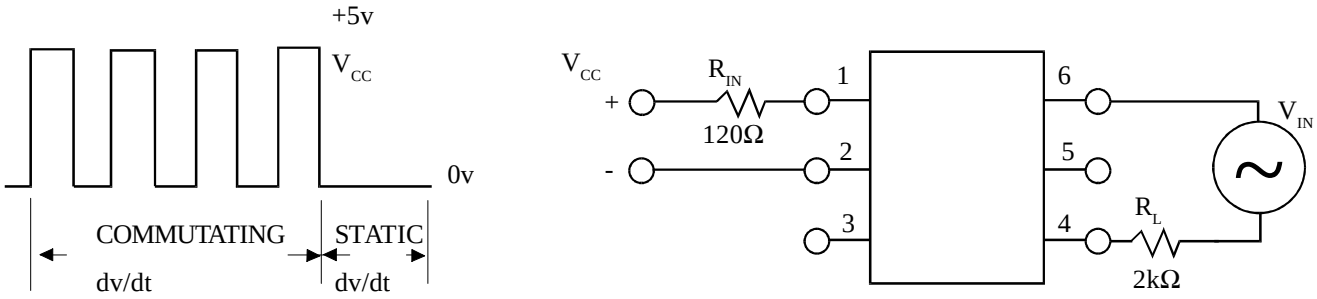

RMS On-state Current vs. Ambient Temperature

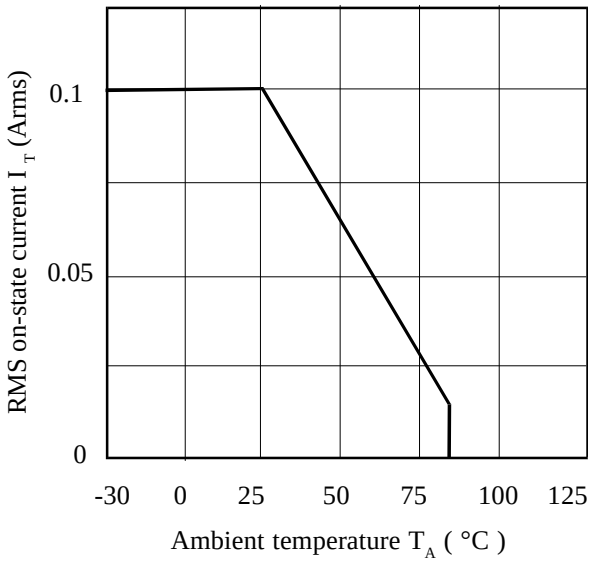

Normalised Repetitive Peak Off-state Voltage vs. Ambient Temperature

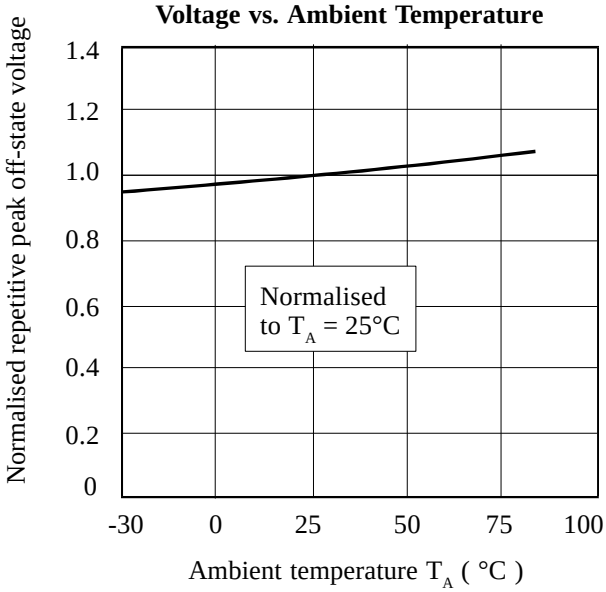

Forward Current vs. Ambient Temperature

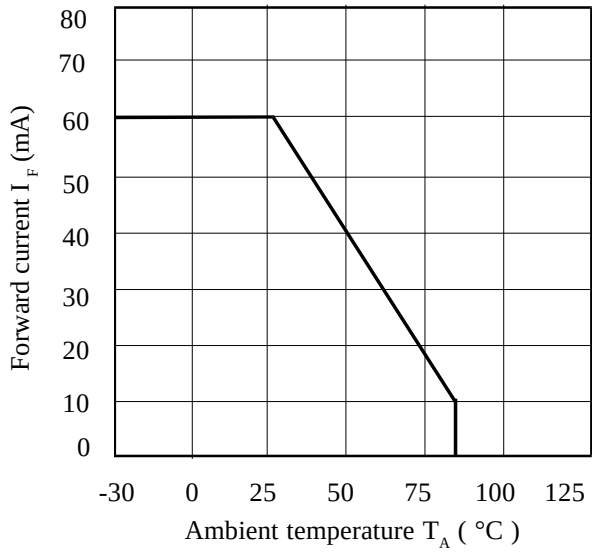

On-state Voltage vs. Ambient Temperature

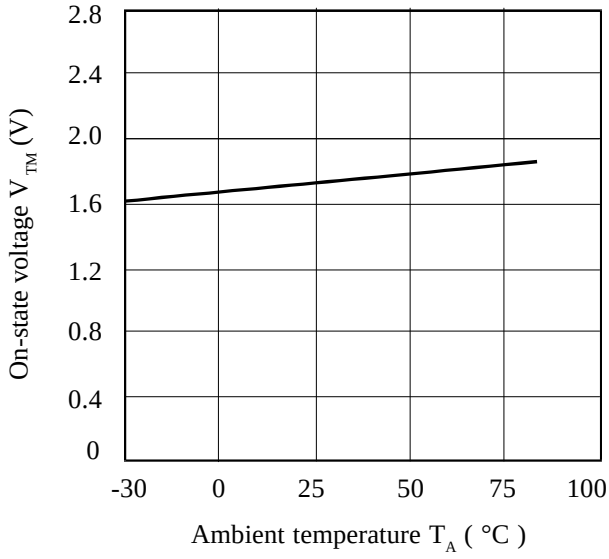

Normalised Input Trigger Current vs. Ambient Temperature

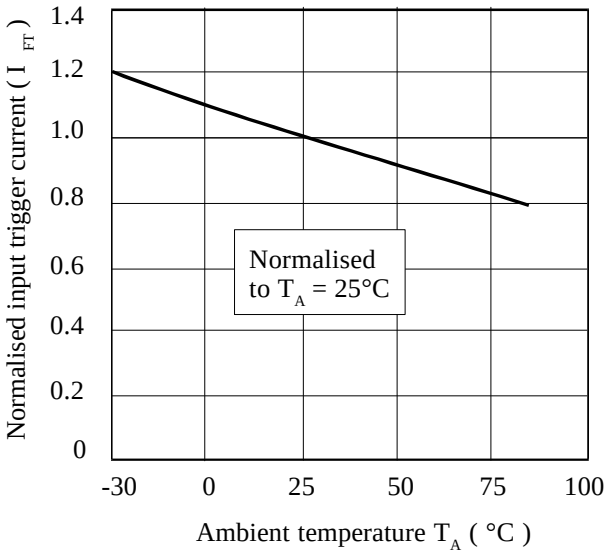

On-state Current vs. On-state Voltage